


M6 HIEFF MONO PERC

SPxxx-120M
(xxx=355~380)


HIGH EFFICIENCY



ISO 14001

ISO 9001

ISO 45001

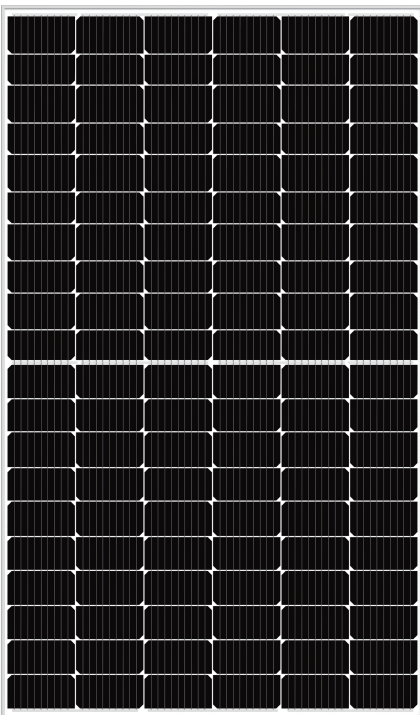

POWER TOLERANCE

0~+3%



WITHSTAND STRONG SNOW LOAD
8000 Pa/ WIND LOAD 8000 Pa



NEW TECHNOLOGY:

HIEFF UP TO 20,86%

Higher yield per surface area,
lower BOS costs, higher power classes,
and an efficiency rate of up to 20.86%.




PRODUCT WITH HIEFF BY SUNPRO TECHNOLOGY

SUNPRO DUO combines cutting edge cell separation and innovative 9-busbar design with SUNPRO Technology.

Reliability & Certification

Product Guarantee: **12-year**
Linear Performance Warranty
12-year:90.7% power output
25-year:80.2% power output

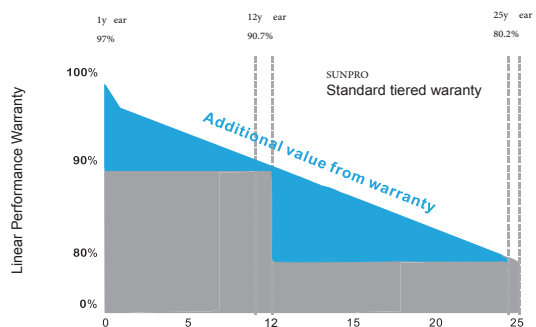

Product Specification

Electrical parameters at standard test conditions
(STC:AM=1.5, 1000W/m², Cells Temperature 25 °C)

Typical type	355W	365W	370W	375W	380W
Max power(Pmax)	355	365	370	375	380
Max power voltage(Vmp)	33.8	34.0	34.1	34.2	34.3
Max power current(Imp)	10.51	10.74	10.85	10.97	11.08
Open circuit voltage (Voc)	41.1	41.3	41.4	41.5	41.6
Short circuit current (Isc)	11.07	11.30	11.41	11.53	11.65
Module Efficiency(%)	19.49	20.04	20.32	20.59	20.86
Max system voltage	DC 1500V(TUV), DC 1000V(TUV)				
Maximum Series Fuse Rating	20A				

Mechanical Data

Item	Specification
Dimensions	1755x1038x35mm
Weight	20.2kgs
Front glass	3.2mm tempered glass
	4mm ²
Output cables	symmetrical lengths
	1100mm
Connectors	MC4 compatible IP68
Cell type	Mono-Crystalline PERC Half-Cell
	83mmx166mm
Number of cells	120 cells

Temperature Characteristics

Item	Specification
Temp.Coeff.of Isc(TK Isc)	0.049%/
Temp.Coeff.of Voc(TK Voc)	-0.26%/
Temp.Coeff.of Pmax(TK Pmax)	-0.34%/
Operating temperature	-40~+85
Normal operating cell temperature	45±2


Packing Configuration

Item	Specification
Container	20'GP 40'GP 40'HQ
Pieces per pallet	58 60 64
Pallets per container	6 13 13
Pieces per container	348 780 832

Test, Certifications and Warranties


Item	Specification
Standard tests	IEC 61215, IEC 61730, IEC 61701, IEC 62716, PPP 58042B
System certs	ISO 9001, ISO14001, ISO45001
Certifications	TUV, AMMONIA AND SALT MIST CORROSION, ANTI-PID, CE, WEEE, INMERTRO
Extreme wind and snow loads testing	Withstand extreme wind(8000 Pascal) and snow loads(8000 Pascal)
Power tolerance	0~+3%
Junction box	IP68
Warranties	12 years product warranty and 25 years 80% of power

Dimensions and Structure

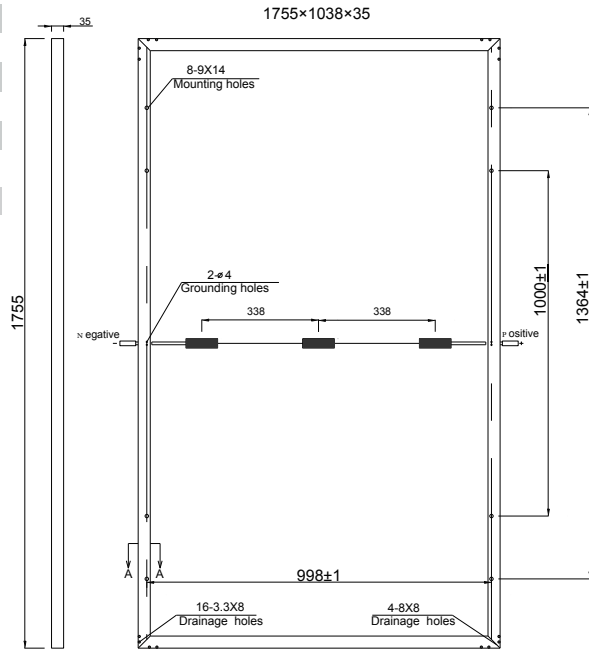


I-V Curve

I-V characteristics at different irradiances

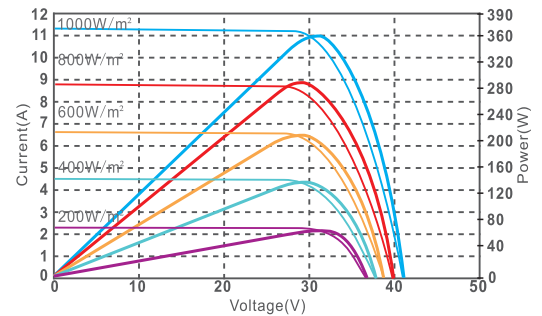


I-V characteristics at different temperature

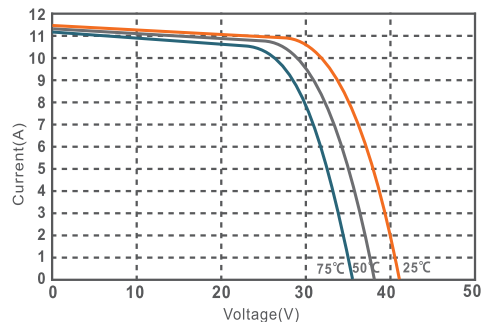

M6 HIEFF TWIN MONO

SPXXX-144M
(XXX=435~460)


HIGH EFFICIENCY



ISO 14001

ISO 9001

ISO 45001

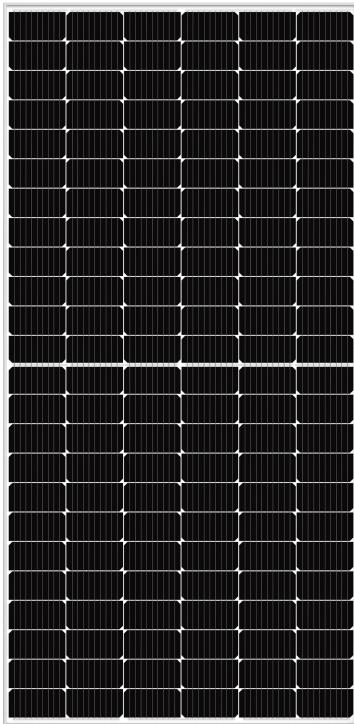

POWER TOLERANCE

0~+3%



WITHSTAND STRONG SNOW LOAD 5400 Pa/ WIND LOAD 2400 Pa



NEW TECHNOLOGY: HIEFF UP TO 20,77%

Higher yield per surface area,
lower BOS costs, higher power classes,
and an efficiency rate of up to 20.77%.




PRODUCT WITH HIEFF BY SUNPRO TECHNOLOGY

SUNPRO DUO combines cutting edge cell separation and innovative 9-busbar design with SUNPRO Technology.

Reliability & Certification

Product Guarantee: **12-year**
Linear Performance Warranty
12-year:90.7% power output
25-year:80.2% power output

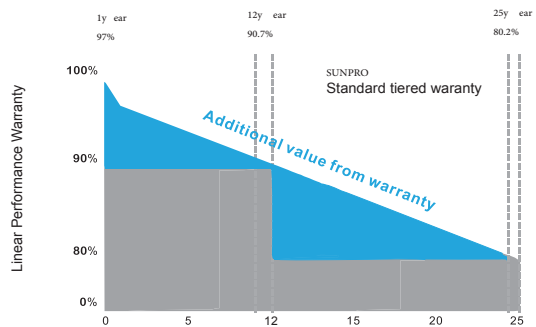

Product Specification

Electrical parameters at standard test conditions
(STC:AM=1.5, 1000W/m², Cells Temperature 25°C)

Typical type	435W	440W	445W	450W	460W
Max power(Pmax)	435	440	445	450	460
Max power voltage(Vmp)	40.7	40.8	40.9	41.0	41.2
Max power current(Imp)	10.69	10.79	10.89	10.98	11.17
Open circuit voltage (Voc)	49.5	49.6	49.7	49.8	49.9
Short circuit current (Isc)	11.23	11.34	11.45	11.56	11.72
Module Efficiency(%)	20.08	20.31	20.54	20.77	21.17
Max system voltage	DC 1500V(TUV) / DC 1000V(TUV)				
Maximum Series Fuse Rating	20A				

Mechanical Data

Item	Specification
Dimensions	2094x1038x35mm
Weight	24.2kgs
Front glass	3.2mm tempered glass
	4mm ²
Output cables	symmetrical lengths 1100mm
Connectors	Mc4 compatible IP68
Cell type	Mono-Crystalline PERC Half-Cell 83mmx166mm
Number of cells	144 cells

Temperature Characteristics

Item	Specification
Temp.Coeff.of Isc(TK Isc)	0.049%/°C
Temp.Coeff.of Voc(TK Voc)	-0.26%/°C
Temp.Coeff.of Pmax(TK Pmax)	-0.34%/°C
Operating temperature	-40~+85°C
Normal operating cell temperature	45±2°C


Packing Configuration

Item	Specification
Container	20'GP 40'GP 40'HQ
Pieces per pallet	60 60 64
Pallets per container	5 11 11
Pieces per container	300 660 704

Test, Certifications and Warranties


Item	Specification
Standard tests	IEC 61215, IEC 61730, EC 61701, IEC 62716, PPP 58042B
System certs	ISO 9001, ISO14001, ISO45001
Certifications	TUV, AMMONIA AND SALT MIST CORROSION, ANTI-PID, CE, WEEE, INMERTRO
Extreme wind and snow loads testing	Withstand extreme wind(2400 Pascal) and snow loads(5400 Pascal)
Power tolerance	0~+3%
Junction box	IP68
Warranties	12 years product warranty and 25 years 80% of power

Dimensions and Structure

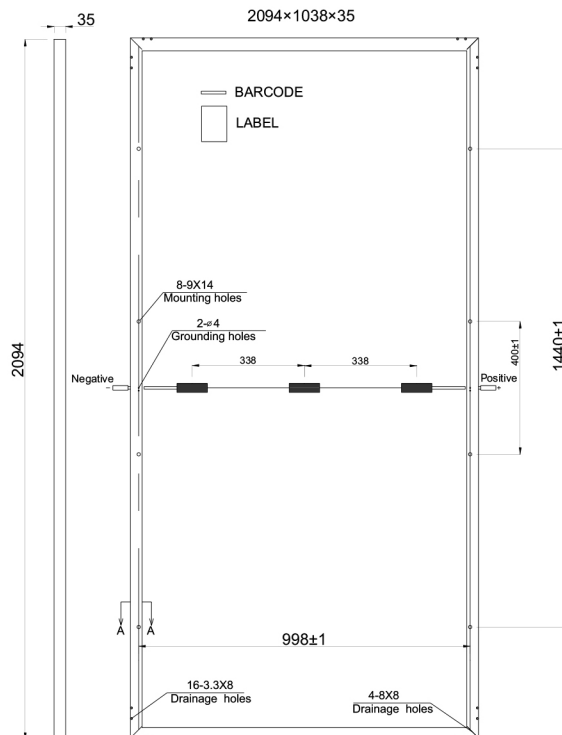

I-V Curve

I-V characteristics at different irradiances

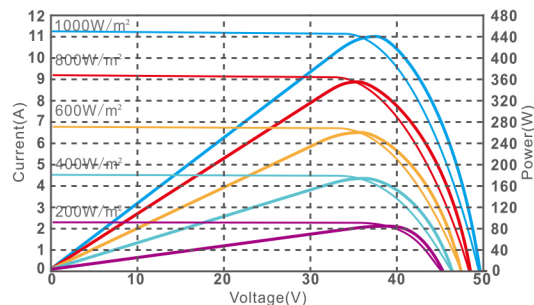

I-V characteristics at different temperature

